

Bulk Meters

WMAP MID WATER METER



Axial helix Woltmann meter with interchangeable mechanism

WMAP MID is the latest range of Woltmann meters by Maddalena. WMAP MID meters feature a dry dial, an axial helix and a removable mechanism. This new range of water meters has been developed in order to meet the strict requirements of the Directive 2004/22/EC on measuring instruments and European Standard EN 14154. WMAP MID meters are manufactured with materials formulated for long-term metrological performance. The rugged design ensures reliable operation. WMAP MID meters are designed for remote communication: they can be retrofitted with a pulse emitter or a radio module maintaining the mechanical and metrological features and without affecting readability. WMAP MID meters are guaranteed by Maddalena: manufacturer of high quality measuring instruments for the past century.

WMAP MID WATER METER

WMAP MID is an axial helix (the axis of the helix is coaxial to the axis of the pipe) **Woltmann meter with removable mechanism**. The magnetically driven register operates in a dry compartment and only the helix is submerged in water. Readability is ensured by the **tempered mineral glass lens**: its flat and smooth surface, unlike plastic lenses, is scratch-resistant and does not turn opaque.

WMAP MID meters are pre-equipped for two pulse outputs as a standard. The pulse emitter can be retrofitted maintaining both the meter functionality and design.

WMAP MID meters can be installed both in horizontal and vertical position. Performance is unaffected by the installation conditions and the water characteristics.

WMAP MID water meters comply with Directive 2004/22/EC (Annex MI-001) and have undergone conformity assessment procedure B+D. The maximum measuring range Q3/Q1 (R) certified is 100. Lower measuring ranges are also available (R80, R50, etc.).

WMAP MID water meters are certified for use with potable water in accordance with Italian (D.M. 6 April 2004 no. 174) and international regulations.

Specifications



- **Tempered mineral glass lens of adequate thickness**
- **The counter is housed in a dry compartment which has no contact with the water ensuring continued readability**
- Straight reading on 7 numbered drums for cubic meters and 2 fractional dials for submultiples
- **The MID inscriptions are on a metallic label applied on a meter's flange**
- Metallic lockable lid
- Pulsed meters maintain the metrological seal and are protected by a cover
- No upstream (use of flow straighteners) and downstream straight pipe requirements
- Hydraulic tests are carried out at three flow rates (Q1, Q2, Q3) on 100% of the production. Our testing benches comply with the Standards ISO 4064/3 and ISO 4185 (EN 14154/3) and are approved by a European notified body
- Cast iron flanged body; internal and external epoxy powder coating
- Steel pivot, synthetic sapphire bearing
- Internal mechanism made of anhygroscopic, anti-scaling and hard-wearing plastic materials
- Maximum water temperature: 50°C
- Nominal pressure (PN): 10 or 16 bar

HYDRAULIC PERFORMANCE

| | | | | | | | | |
|------|--------|----|------|----|-----|-----|-----|-----|
| Size | mm | 50 | 65 | 80 | 100 | 125 | 150 | 200 |
| | inches | 2" | 2.½" | 3" | 4" | 5" | 6" | 8" |

Module B no. TCM 142/10-4717

Module D no. 0119-SJ-A010-08

Metrological class MID $R (Q_3 / Q_1) \leq 100$

Performance in accordance with Directive 2004/22/EC

| | | | | | | | | |
|----------------|-------------------|-------|-----|-------|------|------|------|------|
| Q ₃ | m ³ /h | 25 | 40 | 63 | 100 | 160 | 250 | 400 |
| Q ₄ | m ³ /h | 31,25 | 50 | 78,75 | 125 | 200 | 312 | 500 |
| Q ₁ | l/h | 250 | 400 | 630 | 1000 | 1600 | 2500 | 4000 |
| Q ₂ | l/h | 400 | 640 | 1008 | 1600 | 2560 | 4000 | 6400 |
| R 80 | | | | | | | | |
| Q ₁ | l/h | 312,5 | 500 | 787,5 | 1250 | 2000 | 3125 | 5000 |
| Q ₂ | l/h | 500 | 800 | 1260 | 2000 | 3200 | 5000 | 8000 |

TECHNICAL SPECIFICATIONS

Maximum permissible error between Q₁ and Q₂ (excluded) +/- 5%

Maximum permissible error between Q₂ (included) and Q₄ +/- 2% with water temperature ≤ 30° C
 +/- 3% with water temperature > 30° C

Temperature class T50


Flow profile U0S - D0

sensitivity classes


| | | | | | | | | |
|--|----------------|------------|------------|------------|------------|------------|-------------|-------------|
| Starting flow rate | l/h | 125 | 190 | 320 | 450 | 700 | 1200 | 1800 |
| Pressure loss class (ΔP @ Q ₃) | | ΔP10 | | | | | | |
| Nominal pressure | bar | 10/16 | 10/16 | 10/16 | 10/16 | 10/16 | 10/16 | 10/16 |
| Maximum registration | m ³ | 10,000,000 | 10,000,000 | 10,000,000 | 10,000,000 | 10,000,000 | 100,000,000 | 100,000,000 |
| Minimum registration | l | 0.002 | 0.002 | 0.002 | 0.002 | 0.002 | 0.02 | 0.02 |
| Turbine revolutions/litre | | 1.08 | 1.02 | 0.39 | 0.32 | 0.40 | 0.25 | 0.15 |
| Weight | kg | 10.0 | 11.2 | 15.2 | 17.2 | 22.4 | 29.0 | 42.6 |
| Pulse options | l/imp. | 10-1000 | 10-1000 | 10-1000 | 10-1000 | 10-1000 | 100-10000 | 100-10000 |

DIMENSIONS


| | | | | | | | | |
|---|----|-----|-----|-----|-----|-----|-----|-----|
| L | mm | 200 | 200 | 225 | 250 | 250 | 300 | 350 |
| H | mm | 213 | 220 | 275 | 290 | 305 | 320 | 368 |
| h | mm | 136 | 136 | 186 | 186 | 186 | 186 | 206 |
| D | mm | 165 | 185 | 200 | 220 | 250 | 280 | 340 |

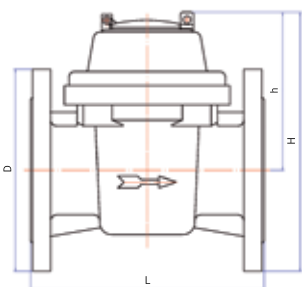


Typical error curve

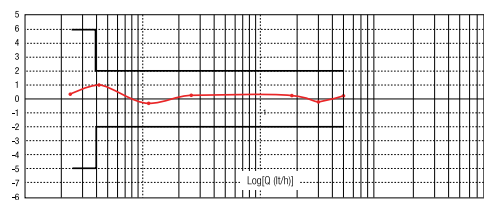

Headloss diagram

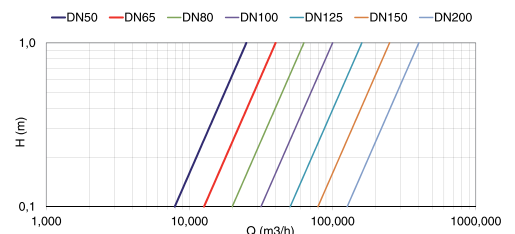

ACCESSORIES



SINGLE REED SWITCH PULSE EMITTER

Suitable for the transmission of consumption data and industrial batching.



ARROW RADIO MODULE

It can be coupled with a pulse emitter for the remote reading of the water meter.



COUNTERFLANGE KIT

It consists of two flanges, two rubber gaskets, screws and nuts.



FLOW STRAIGHTENER

Fitted upstream of the meter.
It allows installation without straight pipe sections.

For more information on the accessories please refer to the relevant data sheet.

| | |
|--|--|
| | |
| | |